


产品名称：吸收式数控衰减器

产品型号：HD-118DA6B63S

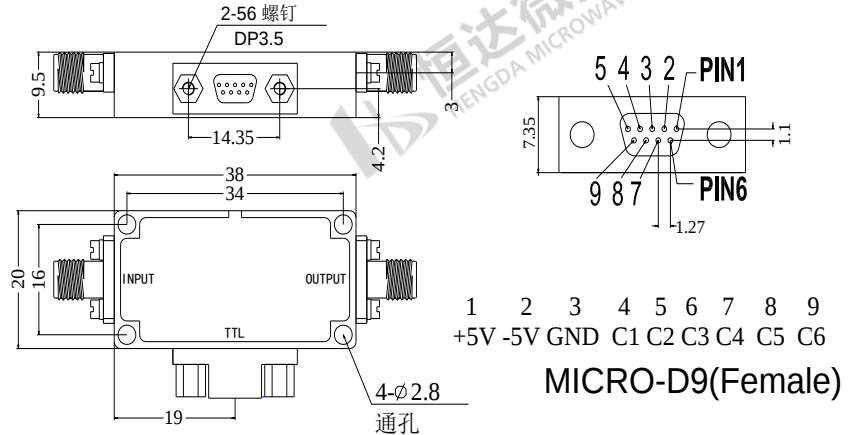

1. 详细技术参数 (*为主要参数)

参 数	最小值	典型值	最大值	单位
频率范围*	1		18	GHz
衰减范围*			63	dB
衰减精度*		±3.0		dB
控制位数			6	Bit
步进值	1			dB
插损		7.3	7.8	dB
插损随温度变化值		0.005		dB/ ° C
输入驻波比 (全衰减状态)		1.6	2.0	: 1
输入驻波比 (全衰减状态)		1.6	2.0	: 1
0.1db压缩点		30		dBm
输入IP3值		45		dBm
重量		39.97		g
阻抗		50		Ω
电流 (+5V / -5V)		130/130		mA
输入输出连接头		SMA-Female		
控制连接		MICRO-D9(Female)		
表面处理		镀金		
腔体材料		铝		
封装形式		标准封装 (气密封装可选)		

2. 逻辑关系


TTL高低电平控制电压						低电压(0)=0-0.8V
						高电压(1)=2.8-5V
控制输入TTL						衰减步进
C6	C5	C4	C3	C2	C1	损耗状态
1	1	1	1	1	1	
1	1	1	1	1	0	1dB
1	1	1	1	0	1	2dB
1	1	1	0	1	1	4dB
1	1	0	1	1	1	8dB
1	0	1	1	1	1	16dB
0	1	1	1	1	1	32dB
0	0	0	0	0	0	63dB
控制方式可按需求定制（TTL控制、USB控制、MICRO-D控制、LAN网络控制）						

3. 额定参数与环境


偏置电压	+5V±10%/-5V±10%
工作温度	-45°C~+85°C
存储温度	-55°C~+125°C
海拔高度	762米（环氧树脂密封条件）
	1524米. 最小1个标准大气压(气密封装条件)(可选)

4. 产品测试图


损耗（+25°C）

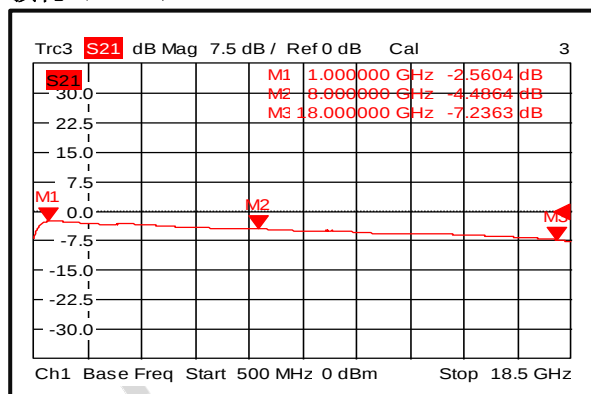


输入驻波比（+25°C）

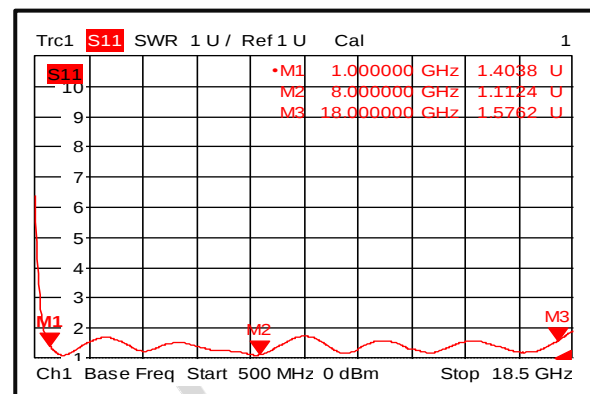


输出驻波比 (+25℃)

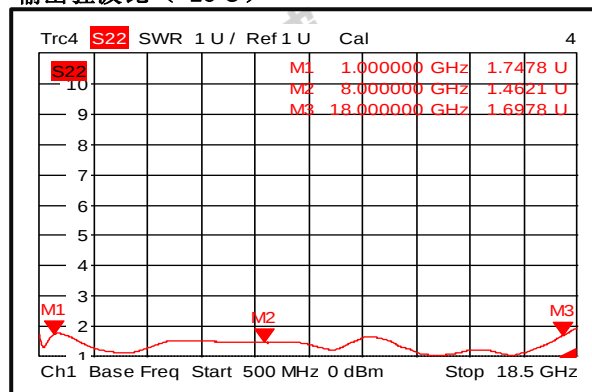


损耗 (-45℃)

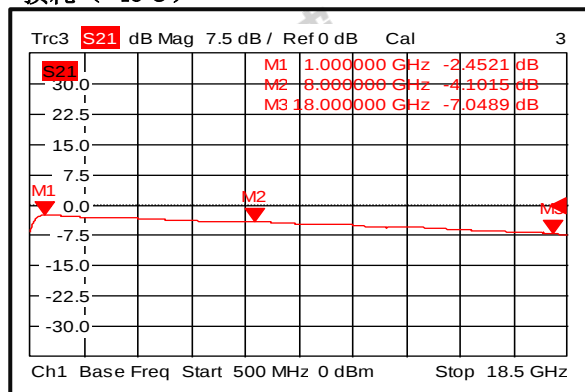


输入驻波比 (-45℃)

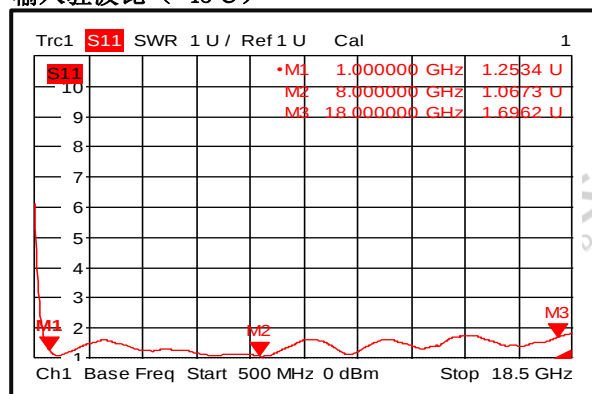


输出驻波比 (-45℃)

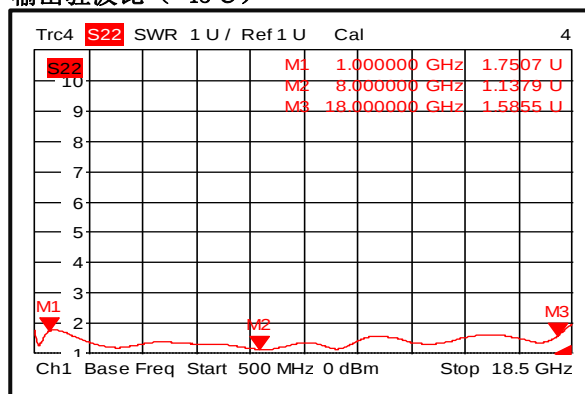


损耗 (+85℃)

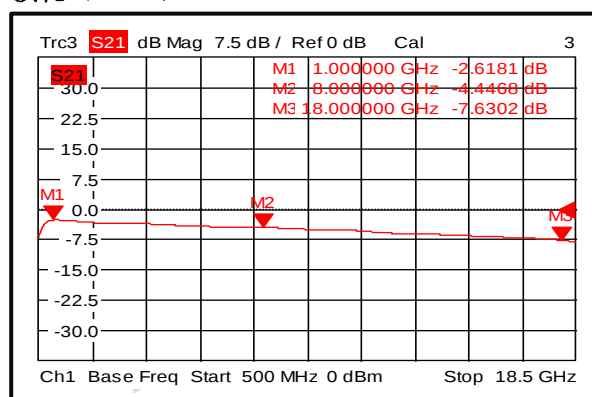


输入驻波比 (+85℃)

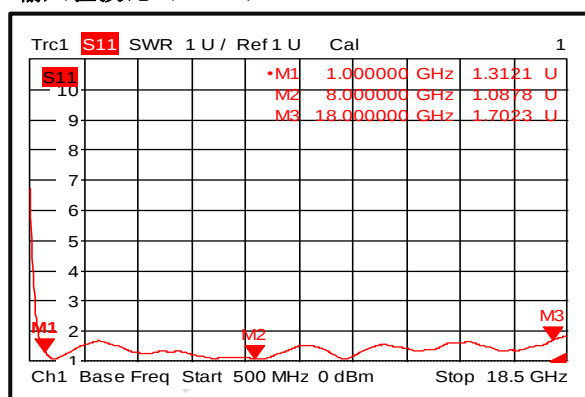


输出驻波比 (+85℃)

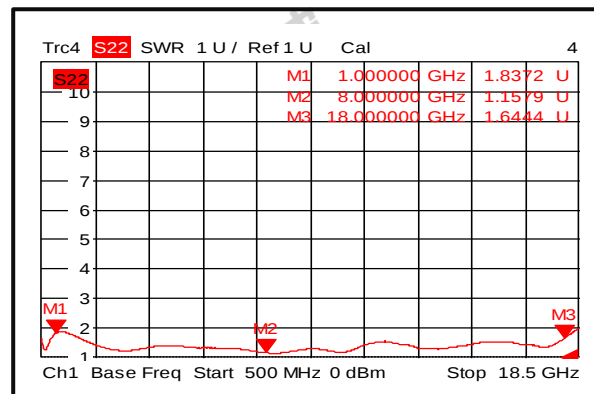


衰减值/频率

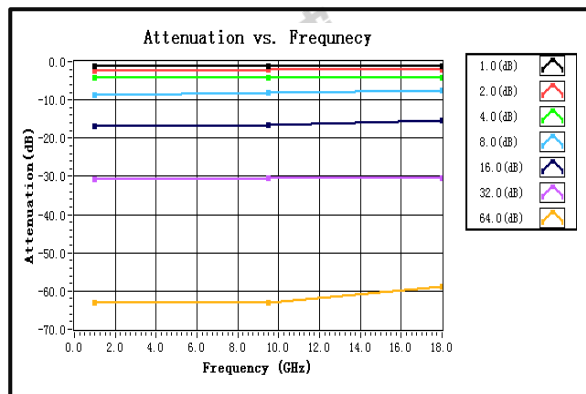


输入驻波比/衰减

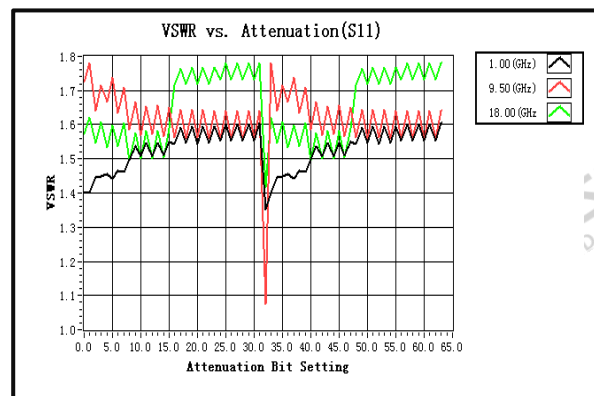


输出驻波比/衰减

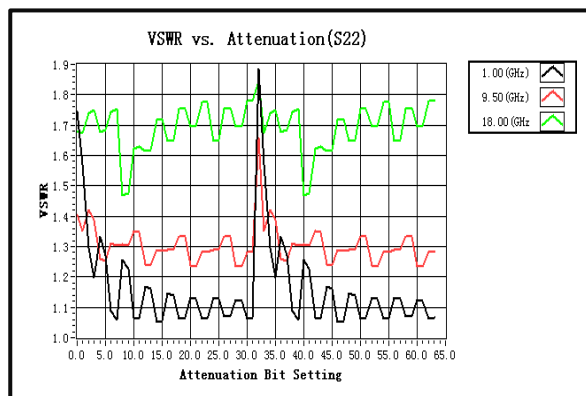


衰减范围线性指标

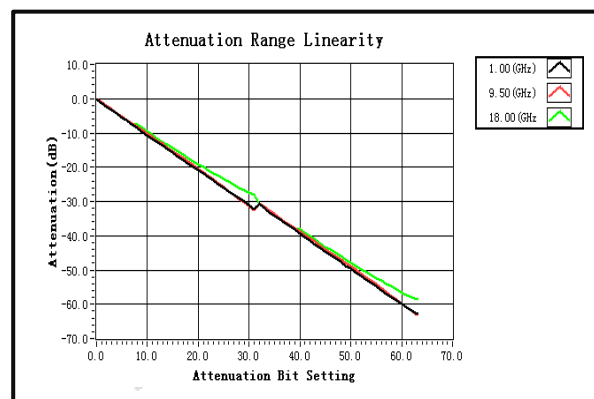


衰减步进偏差

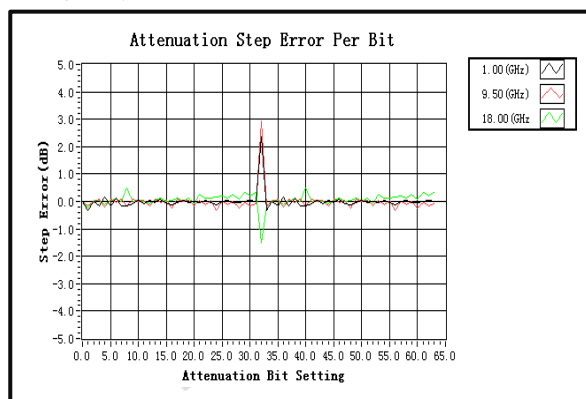


衰减累计偏差

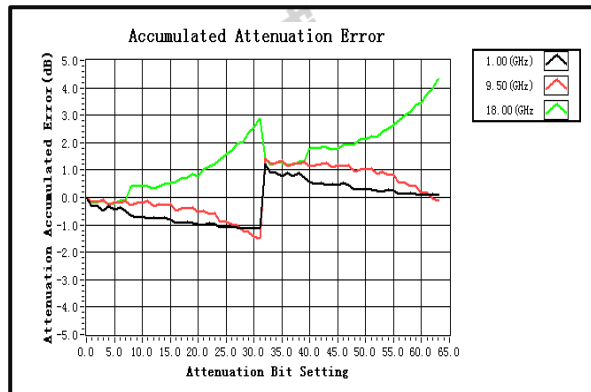


衰减步进相位差

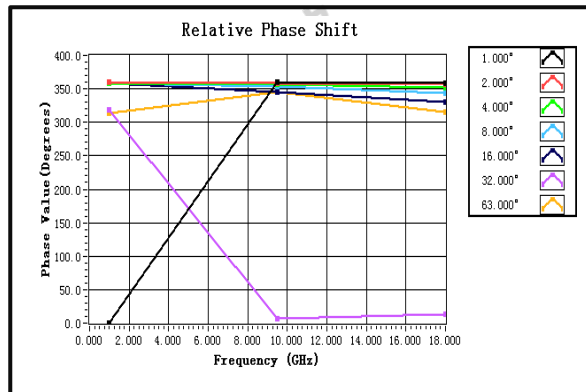

衰减平坦度/频率

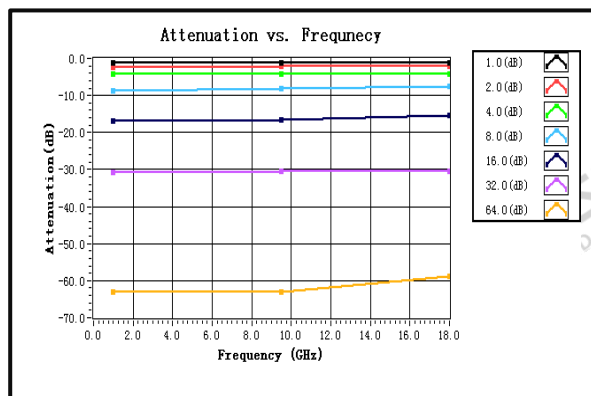

步进时间

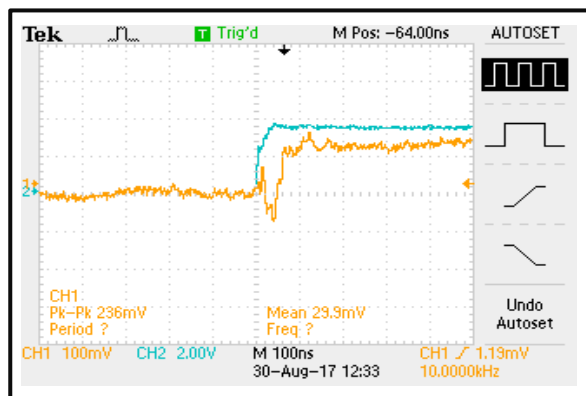

步进时间

