



产品名称：吸收式数控衰减器

产品型号：HD-618DA6B63S

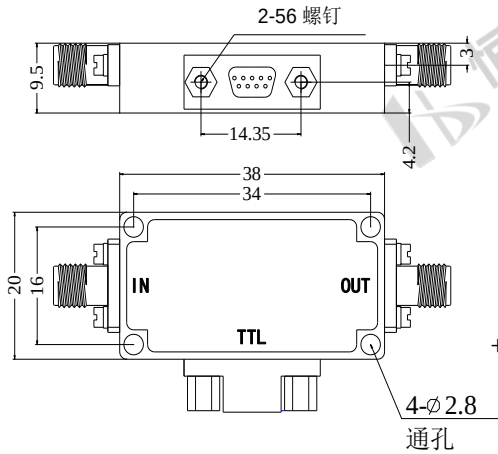

1 2 3 4 5 6 7 8 9
+5V -5V GND C1 C2 C3 C4 C5 C6
MICRO-D9(Female)

1. 详细技术参数 (*为主要参数)

参 数	最小值	典型值	最大值	最小值	典型值	最大值	单位
频率范围*	6-12			12-18			GHz
衰减范围*			63			63	dB
衰减精度*		±1.5	±2.5		±2.0	±3.0	dB
控制位数			6			6	Bit
步进值		1			1		dB
插损		5.5	6.0		6.5	7.5	dB
插损随温度变化值		0.005			0.005		dB/ ° C
输入驻波比 (全衰减状态)		13			14		: 1
输入驻波比 (全衰减状态)		15			15		: 1
0.1db压缩点			30			30	dBm
输入IP3值		50			50		dBm
切换时间			100			100	ns
重量	39.97						g
阻抗	50						Ω
电流 (+5V/-5V)	130/130						mA
输入输出连接头	SMA-Female						
控制连接	MICRO-D9						
表面处理	镀金						
腔体材料	铝						
封装形式	标准封装 (气密封装可选)						

2. 逻辑关系


TTL高低电平控制电压						低电压 (0)=0-0.8V
						高电压 (1)=2-5V
控制输入TTL						衰减步进
C6	C5	C4	C3	C2	C1	损耗状态
1	1	1	1	1	1	
1	1	1	1	1	0	1dB
1	1	1	1	0	1	2dB
1	1	1	0	1	1	4dB
1	1	0	1	1	1	8dB
1	0	1	1	1	1	16dB
0	1	1	1	1	1	32dB
0	0	0	0	0	0	63dB
控制方式可按需求定制（TTL控制、USB控制、MICRO-D控制、LAN网络控制）						

3. 额定参数与环境


偏置电压	+5V±10%/-5V±10%
射频输入功率	+30dBm
工作温度	-45°C~+85°C
存储温度	-55°C~+125°C
海拔高度	762米（环氧树脂密封条件）
	1524米. 最小1个标准大气压(气密封装条件) (可选)

4. 产品测试图


损耗（+25°C）

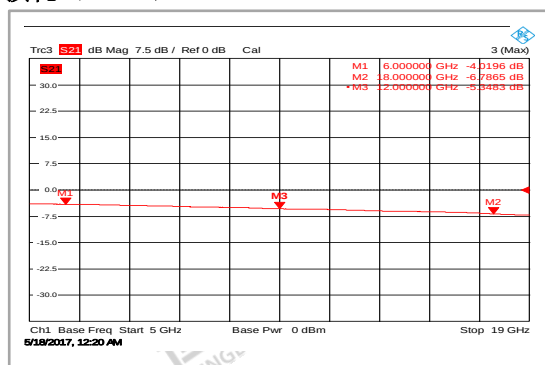


输入驻波比（+25°C）

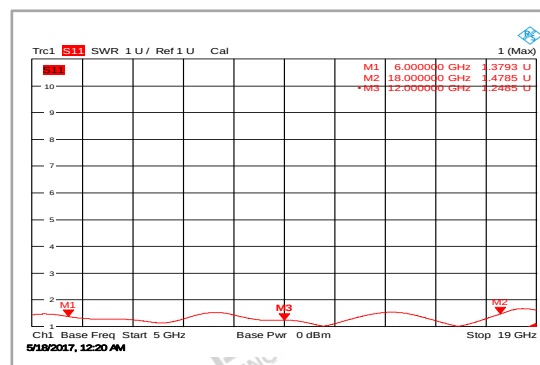


输出驻波比 (+25℃)

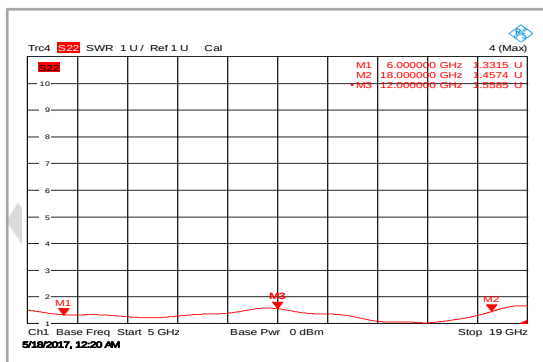


损耗 (-45℃)

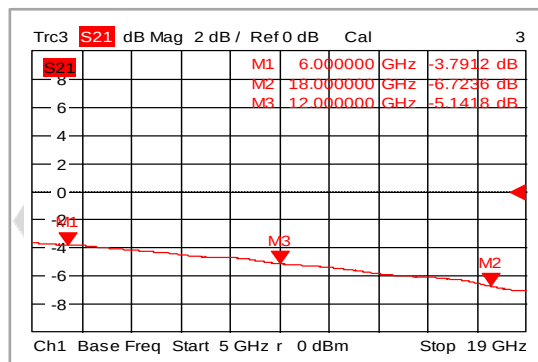


输入驻波比 (-45℃)

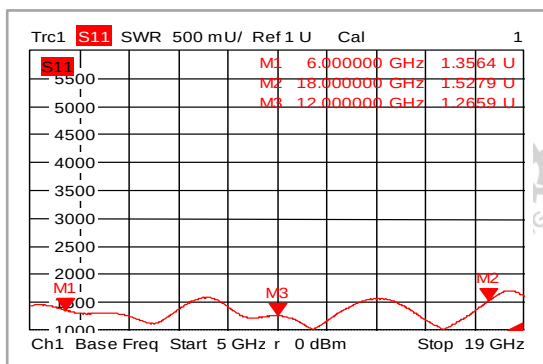


输出驻波比 (-45℃)

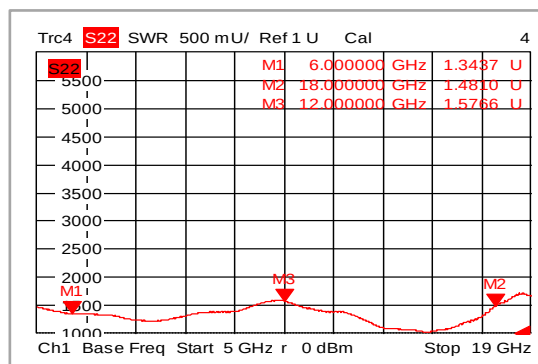


损耗 (+85℃)

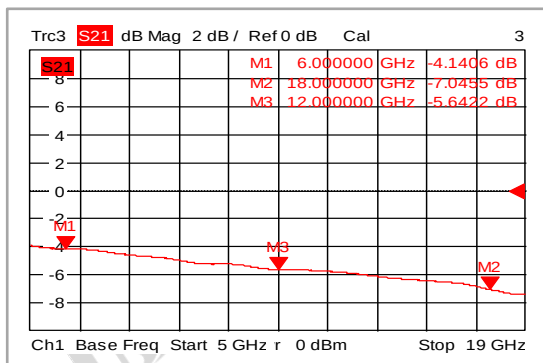


输入驻波比 (+85℃)

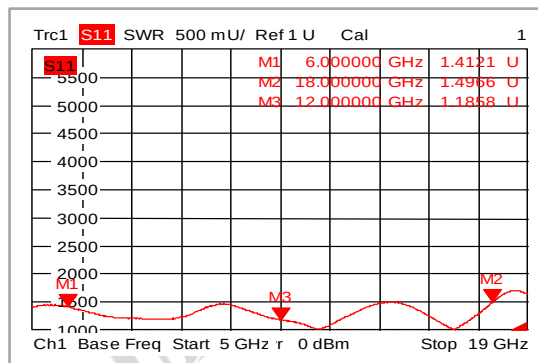


输出驻波比 (+85℃)

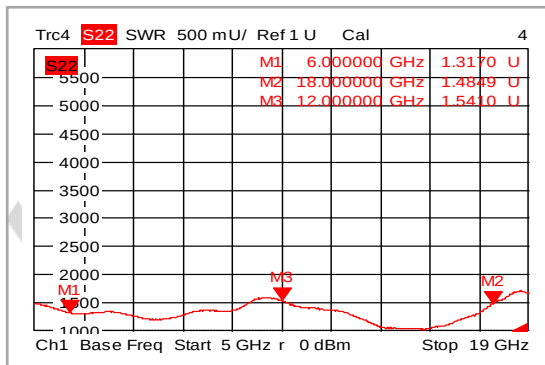


衰减/频率

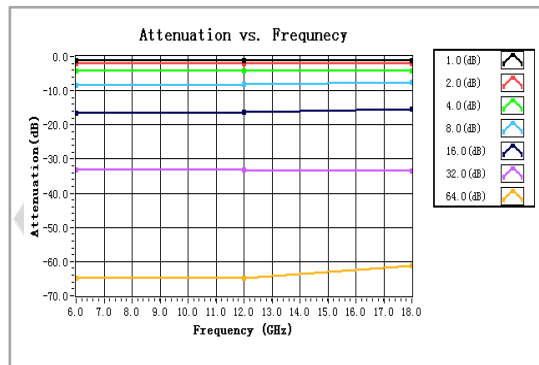


输入回波损耗/频率

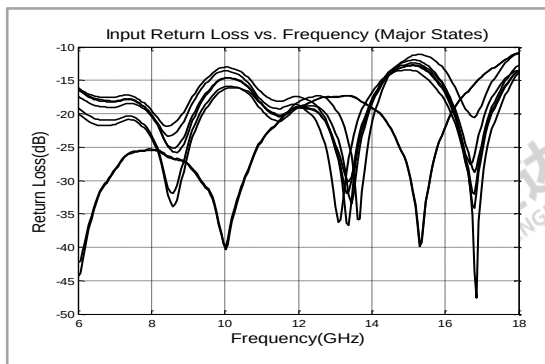


输出回波损耗/频率

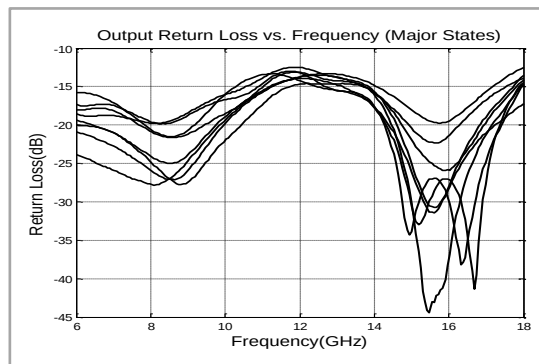


频率/衰减误差

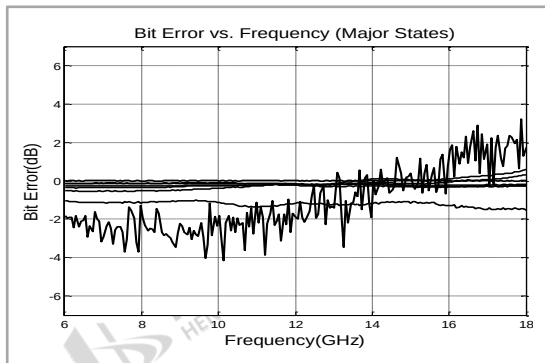


衰减步进误差

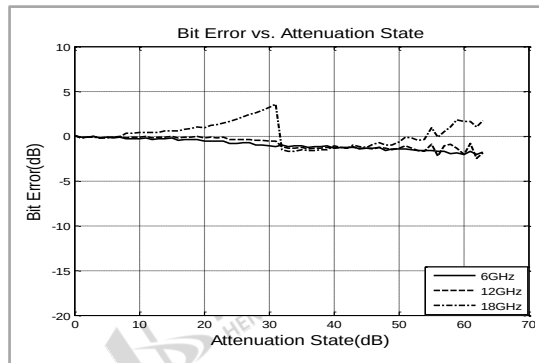


衰减累计偏差

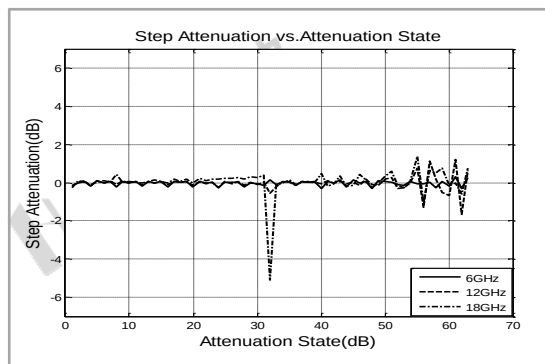

衰减步进相位差

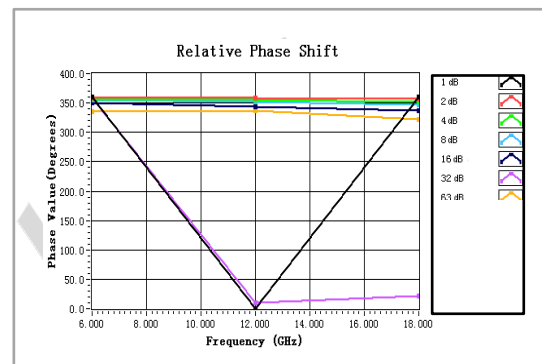

步进时间

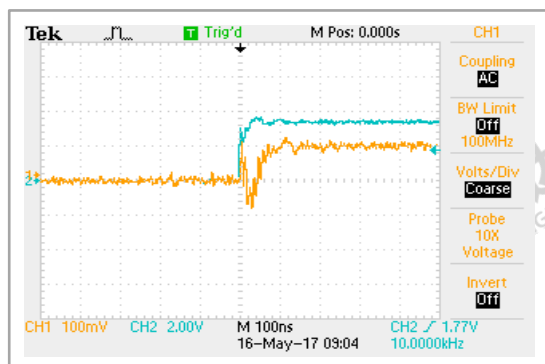

步进时间

