


产品名称：射频反射开关

产品型号：HD-660CSP8TR100WS

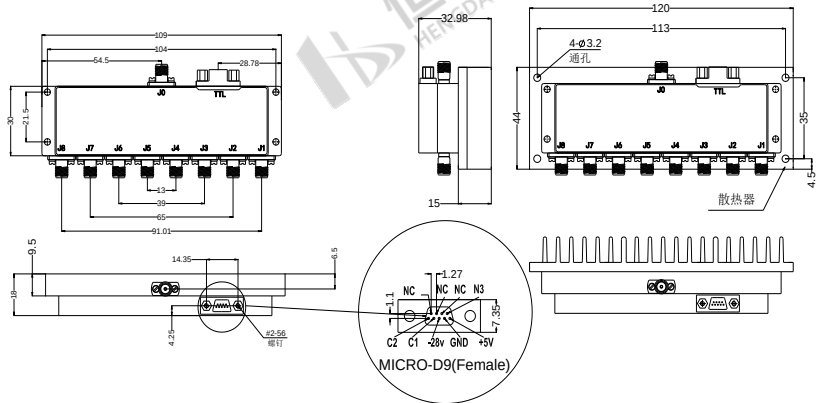

2. 详细技术参数 (*为主要参数)

参 数	最小值	典型值	最大值	最小值	典型值	最大值	单位
频率范围		0.6-3		3-6			GHz
插损		1.0	1.5		1.8	2.5	dB
插损/温度平衡度		0.003			0.003		dB/ ° C
隔离度	55	65		50	55		dB
输入驻波比		1.5	2.0		1.5	1.8	: 1
输出驻波比		1.5	2.0		1.5	1.8	: 1
射频输入功率 (CW)			100			100	W
直流功耗		2.5			2.5		W
0.1dB压缩点		50			50		dBm
输入三阶截获点		55			55		dBm
开关速度		1			1		us
重量			310				g
阻抗			50				Ω
偏置电流 (+5V/-28V)			280/180				mA
输入输出连接头			SMA-Female				
表面处理			镀金				
腔体材料			铝				
封装形式			标准封装 (气密封装可选)				

2. 逻辑关系


TTL高低电平控制电压			低电压 (0)=0-0.8V
			高电压 (1)=2.8-5V
控制输入TTL			信号通断状态
C3	C2	C1	
0	0	0	J0-J1
0	0	1	J0-J2
0	1	0	J0-J3
0	1	1	J0-J4
1	0	0	J0-J5
1	0	1	J0-J6
1	1	0	J0-J7
1	1	1	J0-J8
控制方式可按需求定制 (TTL控制、USB控制、MICRO-D控制、LAN网络控制)			

3. 额定参数与环境


偏置电压	+5V±10%/-28V±10%
工作温度	-45°C~+85°C
存储温度	-55°C~+125°C
海拔高度	762米 (环氧树脂密封条件)
	1524米. 最小1个标准大气压 (气密封装条件) (可选)
注:TTL引脚不能接负压, 否则会损坏内部驱动器。	

4. 产品测试图


损耗 (+25°C)

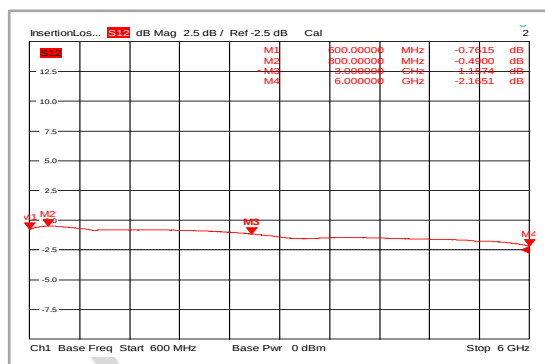


输入驻波比 (+25°C)

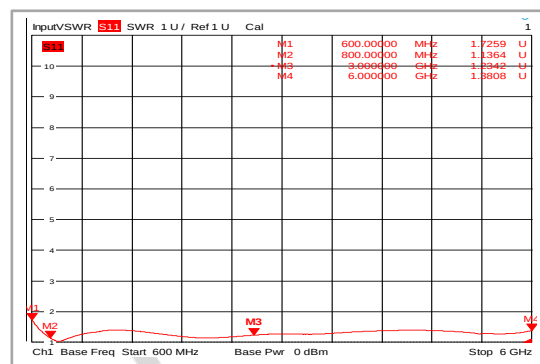


输出驻波比 (+25℃)

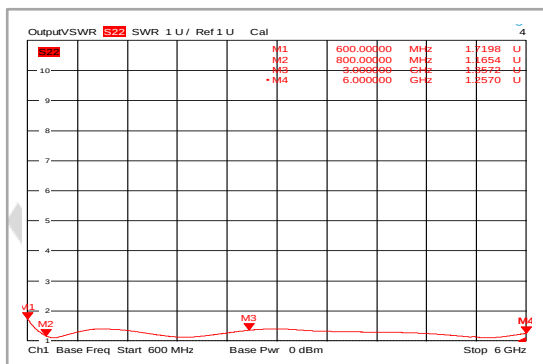


隔离度 (+25℃)

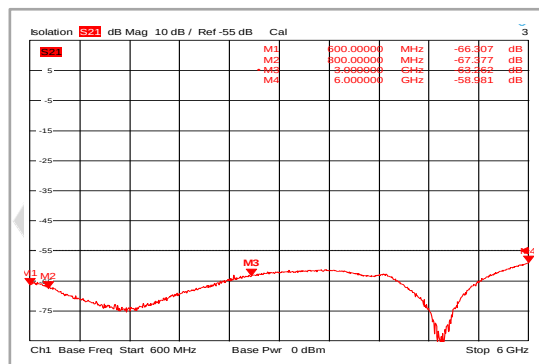


损耗 (-45℃)

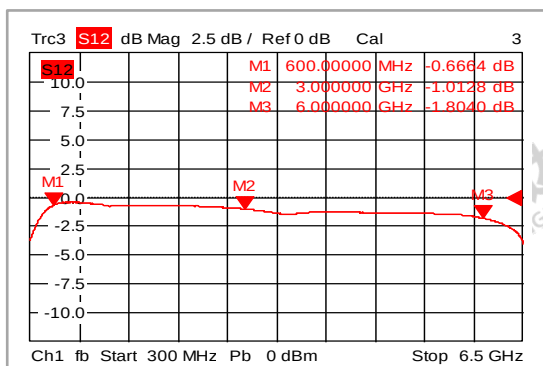


输入驻波比 (-45℃)

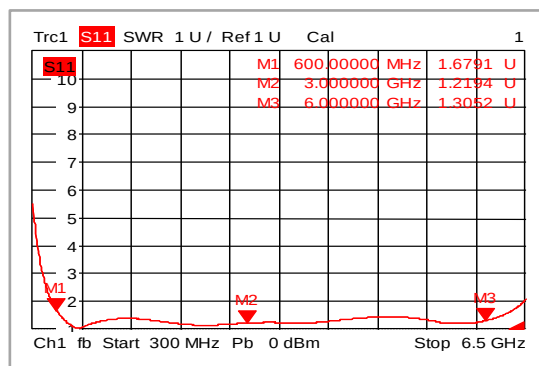


输出驻波比 (-45℃)

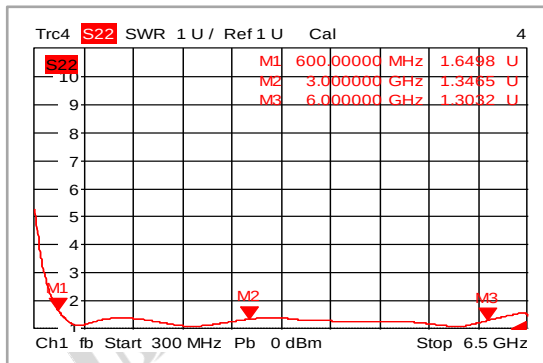


隔离度 (-45℃)

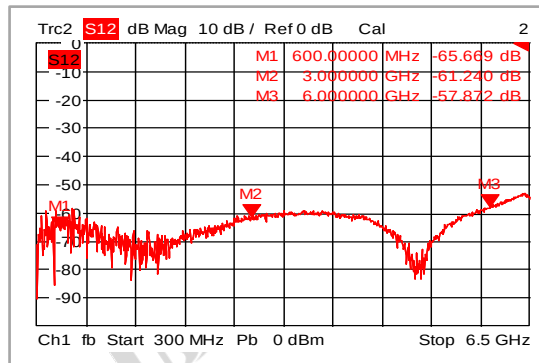


损耗 (+85℃)

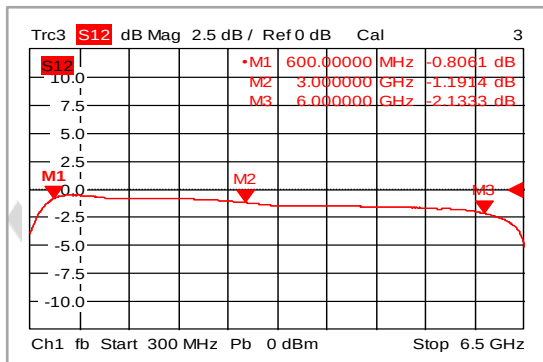


输入驻波比 (+85℃)

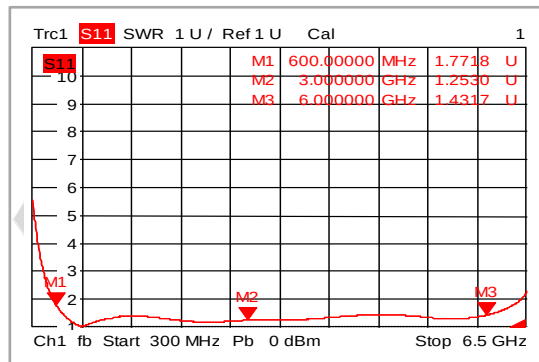


输出驻波比 (+85℃)

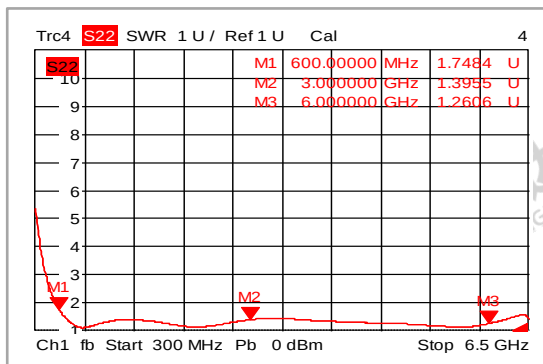

隔离度 (+85℃)

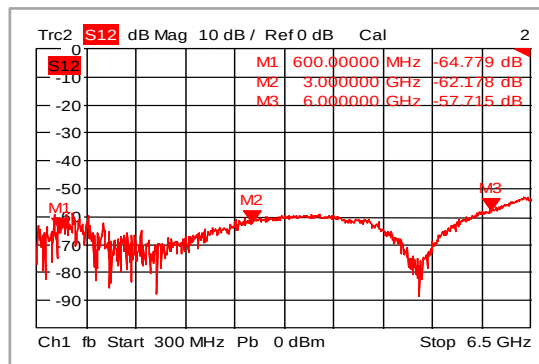

开关速度

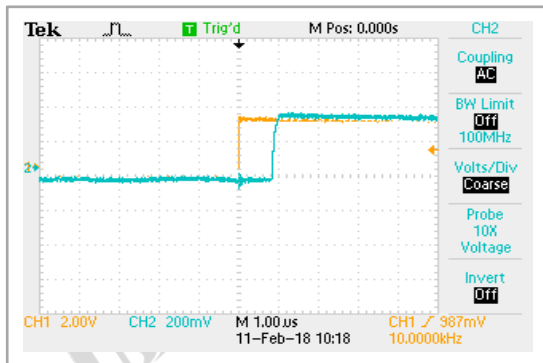

开关速度

